

Please type a plus sign (+) inside this box → ☒

PTO/SB/05 (08-00)
Approved for use through 10/31/2002 OMB 0651-0032
U S Patent and Trademark Office, U S DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 6-1033-043

First Inventor Bernard BUGNET, et al.

Title Device for Activating Conductivity in Porous Structures

Express Mail Label No. EL517260025US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. ☒ Applicant claims small entity status.
See 37 CFR 1.27.
3. ☒ Specification [Total Pages 19]
(preferred arrangement set forth below)
 - Descriptive title of the invention
 - Cross Reference to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to sequence listing, a table, or a computer program listing appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
4. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 3]
5. Oath or Declaration [Total Pages 2]

Unexecuted

 - a. ☐ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 CFR 1.63 (d))
(for continuation/divisional with Box 17 completed)
 - i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b)
6. ☐ Application Data Sheet. See 37 CFR 1.76

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

7. ☐ CD-ROM or CD-R in duplicate, large table or Computer Program (Appendix)
8. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - a. ☐ Computer Readable Form (CRF)
 - b. Specification Sequence Listing on:
 - i. ☐ CD-ROM or CD-R (2 copies); or
 - ii. ☐ paper
 - c. ☐ Statements verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

9. ☐ Assignment Papers (cover sheet & document(s))
10. ☐ 37 CFR 3.73(b) Statement ☒ Power of Attorney
(when there is an assignee)
11. ☒ English Translation Document (if applicable)
12. ☒ Information Disclosure Statement (IDS)/PTO-1449 ☒ Copies of IDS Citations
13. ☒ Preliminary Amendment
14. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
15. ☒ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
16. ☒ Other Claim of Priority

17. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment, or in an Application Data Sheet under 37 CFR 1.76:

☒ Continuation ☐ Divisional ☐ Continuation-in-part (CIP)

of prior application No PCT/IB99/00618

Prior application information

Examiner

Group / Art Unit

For CONTINUATION OR DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 5b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

18. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

Name Curtis A. Bell

Address 206 Sixth Avenue
Suite 1213

City Des Moines

State

Iowa

Zip Code 50309-4076

Country USA

Telephone

(515) 288-9589

Fax

(515) 288-4860

Name (Print/Type) Curtis A. Bell

Registration No. (Attorney/Agent) 36,742

Signature

Date 10/10/2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

FEE TRANSMITTAL
for FY 2001

Patent fees are subject to annual revision

Complete if Known

Application Number	
Filing Date	October 10, 2000
First Named Inventor	Bernard BUGNET, et al.
Examiner Name	
Group Art Unit	
Attorney Docket No.	6-1033-043

TOTAL AMOUNT OF PAYMENT

(\$)

METHOD OF PAYMENT

- 1.
- ☐
- The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to

Deposit
Account
NumberDeposit
Account
Name☐ Charge Any Additional Fee Required
Under 37 CFR 1.16 and 1.17☐ Applicant claims small entity status
See 37 CFR 1.27

- 2.
- ☐
- Payment Enclosed:**

☐ Check ☐ Credit card ☐ Money
Order ☐ Other**FEE CALCULATION****1. BASIC FILING FEE**

Large Entity Small Entity

Fee Fee Fee Fee Fee Description

Code (\$) Code (\$) Code (\$) Code (\$) Code (\$)

101 710 201 355 Utility filing fee

106 320 206 160 Design filing fee

107 490 207 245 Plant filing fee

108 710 208 355 Reissue filing fee

114 150 214 75 Provisional filing fee

Fee Paid

355.00

SUBTOTAL (1) (\$ 355.00)**2. EXTRA CLAIM FEES**

Total Claims	9	-20** =	0	X	Fee from below	=	0	Fee Paid
Independent Claims	1	-3** =	0	X		=	0	
Multiple Dependent						=		

Large Entity Small Entity

Fee Fee Fee Fee Fee Description

Code (\$) Code (\$) Code (\$) Code (\$) Code (\$)

103 18 203 9 Claims in excess of 20

102 80 202 40 Independent claims in excess of 3

104 270 204 135 Multiple dependent claim, if not paid

109 80 209 40 ** Reissue independent claims over original patent

110 18 210 9 ** Reissue claims in excess of 20 and over original patent

SUBTOTAL (2)

(\$ 355.00)

**or number previously paid, if greater, For Reissues, see above

FEE CALCULATION (continued)**3. ADDITIONAL FEES**

Large Entity Small Entity

Fee Fee Fee Fee Fee Description

Code (\$) Code (\$) Code (\$) Code (\$) Code (\$)

105 130 205 65 Surcharge - late filing fee or oath

127 50 227 25 Surcharge - late provisional filing fee or cover sheet

139 130 139 130 Non-English specification

147 2,520 147 2,520 For filing a request for ex parte reexamination

112 920* 112 920* Requesting publication of SIR prior to Examiner action

113 1,840* 113 1,840* Requesting publication of SIR after Examiner action

115 110 215 55 Extension for reply within first month

116 390 216 195 Extension for reply within second month

117 890 217 445 Extension for reply within third month

118 1,390 218 695 Extension for reply within fourth month

128 1,890 228 945 Extension for reply within fifth month

119 310 219 155 Notice of Appeal

120 310 220 155 Filing a brief in support of an appeal

121 270 221 135 Request for oral hearing

138 1,510 138 1,510 Petition to institute a public use proceeding

140 110 240 55 Petition to revive - unavoidable

141 1,240 241 620 Petition to revive - unintentional

142 1,240 242 620 Utility issue fee (or reissue)

143 440 243 220 Design issue fee

144 600 244 300 Plant issue fee

122 130 122 130 Petitions to the Commissioner

123 50 123 50 Petitions related to provisional applications

126 240 126 240 Submission of Information Disclosure Stmt

581 40 581 40 Recording each patent assignment per property (times number of properties)

146 710 246 355 Filing a submission after final rejection (37 CFR § 1.129(a))

149 710 249 355 For each additional invention to be examined (37 CFR § 1.129(b))

179 710 279 355 Request for Continued Examination (RCE)

169 900 169 900 Request for expedited examination of a design application

Other fee (specify) _____

Fee Paid

65.00

SUBTOTAL (3) (\$ 420.00)

* Reduced by Basic Filing Fee Paid

SUBMITTED BY

Complete (if applicable)

Name (Print/Type)

Curtis A. Bell


Registration No
(Attorney/Agent)

36,742

Telephone

(515) 288-9589

Signature



Date

10/10/2000

WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

Burden Hour Statement This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants: Bernard BUGNET, Jacques DONIAT and Robert ROUGET

Serial No: Not Yet Assigned

Filed: On even date herewith

For: **DEVICE FOR ACTIVATING CONDUCTIVITY IN POROUS STRUCTURES**

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, D.C. 20231

Dear Sir:

Prior to the calculation of fees and the examination of the above-identified application,
kindly amend the application as follows:

AMENDMENT

In the Claims:

Kindly amend claims 4, 5 and 7 as follows:

4. (Amended) A device according to [claims 1 and 3] claim 1, characterised in that it includes at least one reactor equipped with a hollow, perforated and rotatable core onto which the porous structure block or roll to be treated is fitted, said core being used to inject the treatment solutions used into the block or roll and/or to aspirate it therefrom and/or to rotate the block or roll on itself in order to homogenise the diffusion of the fluids within it and/or to expel said fluids centrifugally, and
flanges and a perforated rack fixed to the core contribute to supporting the block or roll around the core.

EXPRESS MAIL CERTIFICATE

No. EL517260025 US
I hereby certify that this paper or fee is being
deposited with the U.S. Postal Service using
"Express Mail-Post Office to Addressee"
service under 37 CFR 1.10 and addressed to the
Commissioner of Patents and Trademarks,
Washington, D.C. 20231 on 10-10-2000

Shirley Conrad

5. (Amended) A device according to [claims 1, 3 and 4] claim 1, characterised in that it includes at least one reactor equipped with a hollow, perforated and rotatable core onto which the porous structure block or roll to be treated is fitted, said core being used to inject the treatment solutions used into the block or roll and/or to aspirate it therefrom and/or to rotate the block or roll on itself in order to homogenise the diffusion of the fluids within it and/or to expel said fluids centrifugally;

flanges and a perforated rack fixed to the core contribute to supporting the block or roll around the core, and

a porous material is disposed between the block or roll to be treated and the rack and/or the flanges.

7. (Amended) A device according to [claims 1 and 6] claim 1, characterised in that it includes tanks for storing the solutions used for the treatment, which tanks are connected to the reactor by pipes for transferring each solution to the reactor and returning it to its specific tank, and

some or all of the storage tanks are equipped with stirrer systems and/or temperature regulation systems and/or metering systems and/or systems for continuously or intermittently maintaining the concentrations of the solutions.

In the Specification:

After page 22, kindly insert the following for the Abstract, also submitted as a separate page:

---Abstract of the Disclosure

The invention concerns the treatment of porous structures such as cross-linked foams, woven or nonwoven, to make them electrically conductive by depositing polymers. The device enables, in a chemical reactor, to perform the activating treatment directly through non-reeled off blocks or rolls of porous structures, the treating fluids of the successive steps being made to circulate inside said blocks or rolls, via a perforated rotary mandrel whereon they are pressed. Said device enables to activate efficiently the structures, which may be metal-coated or not, and are particularly designed to be used as electrodes for liquid effluent electrolysis, of detectors and

traps of organic or biological molecules, electrode supports for electrochemical generators, catalyst supports, filtering media, acoustic insulants, electromagnetic, nuclear and antistatic protection structures, heat exchangers and the like.---

REMARKS

Claims 1-9 are pending in the above-identified application.

Claims 4, 5 and 7 have been amended to more particularly point out and distinctly claims the subject matter which Applicants regard as the invention and to eliminate multiple dependency and the fees associated therewith.

An Abstract of the Disclosure has been added.

CONCLUSION

Favorable action is most earnestly solicited.


If the Examiner has any questions, or wishes to discuss this matter, please contact the undersigned at the telecommunication numbers listed below.

Respectfully submitted,
Bernard BUGNET, Jacques DONIAT
and Robert ROUGET

Date: OCTOBER 10, 2000

HENDERSON & STURM LLP
206 Sixth Avenue, Suite 1213
Des Moines, Iowa 50309-4076
Telephone: (515) 288-9859
Telefax: (515) 288-4860

By:


Curtis A. Bell
Reg. No. 36,742

Abstract of the Disclosure

The invention concerns the treatment of porous structures such as cross-linked foams, woven or nonwoven, to make them electrically conductive by depositing polymers. The device enables, in a chemical reactor, to perform the activating treatment directly through non-reeled off blocks or rolls of porous structures, the treating fluids of the successive steps being made to circulate inside said blocks or rolls, via a perforated rotary mandrel whereon they are pressed. Said device enables to activate efficiently the structures, which may be metal-coated or not, and are particularly designed to be used as electrodes for liquid effluent electrolysis, of detectors and traps of organic or biological molecules, electrode supports for electrochemical generators, catalyst supports, filtering media, acoustic insulants, electromagnetic, nuclear and antistatic protection structures, heat exchangers and the like.

DEVICE FOR ACTIVATING CONDUCTIVITY IN POROUS STRUCTURES

The invention relates generally to the field of treating porous structures to render them electrically
5 conductive.

The invention relates more particularly to the field of preparing complex and highly porous structures, possibly made of metal or metal-plated, for use as electrodes for electrolysing liquid effluents, for
10 detecting and trapping organic or biological molecules, as electrode supports for storage cells, as supports for catalysts, filter media, acoustic insulation, electromagnetic and nuclear protection structures and antistatic structures, heat exchangers, etc.

The structures according to the invention are foam, felt or woven structures with a high content of open pores, giving the appearance of a dense network of fibres or
15 meshes with a three-dimensional framework, defining a plurality of open spaces communicating with each other and with the exterior of the structure.

Foams are highly porous cross-linked open-pore cellular structures in which the all the meshes of the network or at least a large proportion of them communicate
20 with each other. Their porosity exceeds 80% and can be as high as approximately 98%.

Felts are random interleavings of non-woven fibres (although most of the fibres are located substantially in the plane of the resulting "nap"). Intercommunicating
25 spaces of varying shape and size are defined between the fibres, which are optionally bonded by a binding agent.

Woven materials are structures made by interleaving (weaving or knitting) textile fibres or filaments. They can take the form of thick and complex structures, in
30 particular if they have two woven outside faces connected by knitted together filaments which hold them apart and

simultaneously interconnect them, for example materials of the kind made on Raschel weaving looms.

The various complex porous structures can be made from various basic materials, and in accordance with the invention may be intended to be metal-plated throughout their thickness, over the whole of their developed surface, without blocking their pores.

Foams are made from organic or mineral, natural or synthetic materials, and in particular polymers such as polyamide, polyurethane (polyester or polyether) or polypropylene.

Felts and woven materials are also made from organic or mineral materials, such as the polymers previously cited, glass fibres, mineral wool fibres or carbon fibres, or natural fibres such as cotton, wool or the like.

Various activation processes to enable electroplating of such structures have already been proposed, including:

- chemical deposition of metal, followed by one or more electrochemical deposition stages,
- deposition of carbon or graphite particles, in particular in the form of conductive paint or lacquer, followed by one or more electrochemical deposition stages,
- deposition of a metal in a vacuum, in particular by cathode sputtering, gaseous diffusion or ionic deposition, followed by one or more electrochemical deposition stages,
- deposition by thermal decomposition of a metallic substance or salt in the vapour phase, and
- chemical deposition of conductive polymer, followed by one or more stages of electrochemical deposition of metal.

In all cases where the intention is to carry out one or more electrochemical deposition stages, it is

necessary to render the surface to be electroplated electrically conductive beforehand. This is the function of the "conductive activation" step which is included in most of the processes cited (chemical deposition of metal or polymers, deposition of carbon particles, deposition in a vacuum).

The activation methods for subsequent implementation of one more electroplating stages described hereinabove and used industrially until now have not been applied to complex porous structures except for a treatment in the form of thin (thickness of the order of one millimetre) sheets (or strips), which have had to be conveyed and drawn through one or more treatment tanks (chemical baths, carbon lacquer baths, vacuum deposition enclosures). This has been one of the major limitations of such processes from both the technical and economic points of view.

Thus only complex porous structures in thin layers (sheets or strips) have been activated industrially in the past. With the exception of chemical deposition processes, the thin layers are limited to thicknesses of the order of one millimetre or a few millimetres, depending on the porosity of the treated product, the dimensions of its pores or interstices, and the penetration power of the activation process.

Accordingly, foams of the so-called "100 ppl" (100 pores per linear inch) grade, i.e. having approximately 40 pores per linear centimetre at the surface, cannot be satisfactorily activated industrially other than in thicknesses less than approximately 5 millimetres when using vacuum deposition or thicknesses less than approximately 3 millimetres when depositing carbon or graphite powder.

French patent application number 98.03375, whose title in translation is "Thick complex porous structures

rendered electrically conductive, and corresponding conductive activation method", represented a considerable step forward in the field of conductive activation methods. It covers the first activation method enabling treatment throughout their volume of complex porous structures having varied thicknesses and shapes, in particular blocks or rolls, without requiring any unrolling operation. This constituted a real breakthrough compared with all previous practises. The method adopts the principle of chemical deposition of a conductive polymer.

Here, and hereinafter, the term "roll" refers to a cylinder formed by rolling a porous structure strip.

The subject matter of the present invention is a device designed for practical use of the method described in the document 98.03375 mentioned above.

The device according to the invention is especially intended for treating rolls and blocks of cross-linked foam and rolls of woven and non-woven material.

Using the method described in the document 98.03375, the treatment solutions are passed through the structure, rather than the structure having to be passed successively through the various baths of a conventional production line.

The conductive activation treatment therefore works by completely impregnating the porous structure block or roll to be treated with the various solutions injected into the mass of the porous structure and used for:

- preparatory pre-treatment of the porous structure, in particular by oxidation,
- deposition or fixation of monomer,
- oxidation leading to polymerisation and simultaneously to doping of the monomer.

The intermediate draining, rinsing and drying steps are also applied throughout the block or the whole roll, without unrolling it.

A typical sequence of activation treatment steps is as follows:

a) preparatory pre-treatment of the surface of the basic structure,

5 b) rinsing, possibly followed by draining and drying,

c) depositing a monomer,

d) draining,

10 e) polymerising the monomer by oxidation-doping to yield an electrically conductive polymer,

f) rinsing and draining; and

g) optional drying.

The above steps are carried out one after the other throughout the volume of the structure to be treated.

5 The preparatory pre-treatment can naturally vary with the material of which the structure is formed, its density, the type of porous structure treated and the nature of the monomer to be deposited.

20 When conductive activation using polypyrrole on polyurethane foam is required, for example, it is advantageous, before depositing the corresponding monomer (the pyrrole) to carry out an oxidising pre-treatment of the surface of the meshes to the structure, which in principle is comparable with the etching process used in the textile industry.

25 To facilitate the description, the device in accordance with the invention is described hereinafter with reference to figures provided by way of illustration of the possibilities of implementation of said device, without the invention being limited or restricted in any way by the configurations put forward by way of example.

30 Accordingly, figure 1 is a partial profile view of a device according to the invention including a reactor (1). Figure 2 is a diagrammatic plan view showing the layout of the various main components of the device.

According to the present invention, the processing installation is organised around a chemical reactor (1) into which the porous structure that is to be rendered electrically conductive is inserted through a door (2).

5 The structure to be treated takes the form of a roll or spool formed by rolling a strip of cross-linked foam, felt or woven material on itself, or the form of a block of cross-linked foam. Although the conventional general shape of rolls or spools is substantially cylindrical, the blocks can be various shapes, depending in particular on the shapes required after activation or possibly after metal-plating. The blocks treated are nevertheless usually substantially cylindrical, although the invention is not limited to this. The main form of shaping used afterwards is to cut the block into strips of varied thickness, which operation can be easily effected by peeling a cylindrical block as it is rotated about its axis.

20 The blocks or rolls (4) are prepared so that they have a hollow central axis or hub passing completely through them into which is inserted a core (3) which is an integral part of the reactor.

The core, which is optionally removable, is perforated with holes (5) over the portion of its surface intended to be in contact with the porous structure block or roll. It fulfils or can fulfil several functions in the processing device:

- fixing the roll or block in the reactor,
- support shaft on which the block or roll rotates,
- 30 - passage for injecting treatment solutions, and
- passage for aspirating treatment solutions.

The porous structure rolls or blocks to be activated are inserted into the reactor around the core, as shown in figure 1. They can be held in a complementary manner by a rack (6) placed around the block or roll and

substantially adopting its outside shape, as well as by flanges (7) which also fasten together the rack (6) and the core (3).

In the case of cylindrical rolls or blocks, the rack (6) itself takes the form of a hollow tube or cylinder within which the porous structure (4) to be treated is placed and which fits over the core. The rack (6) is advantageously made of perforated sheetmetal, expanded metal or a grid. The end flanges (7) of the rack (6) can be perforated or solid.

The core (3) is connected at one end at least to a hollow shaft (8) by means of which an injection and/or aspiration pump (9) circulates the treatment solutions. The pump connects the shaft (8) and the core (3) to pipes (10) leading to treatment solution storage tanks (11).

The shaft (8) can be rotated by a motor (12). When the motor (12) rotates the shaft (8), the shaft drives the core (3) and the block or roll (4). Depending on the treatment steps, it may or may not be advantageous to use such rotation, the speed of which can be varied over a wide range.

The wall of the reactor (1) is provided with treatment solution supply and/or evacuation pipes (13).

According to the invention, the solutions or some of the solutions can be injected via the core (3) and returned to their respective storage tanks (11) via the pipes (13), or the converse arrangement can be adopted, i.e. injecting them via the pipes (13) and recovering them, by means of pumps, through the core (3) and then the shaft (8), the pump (9) and the pipes (10).

It is equally possible, during the same treatment step, to reverse once or more times the directions in which the solutions are injected/recovered, in order to encourage as homogeneous as possible a distribution of said solutions within the block or roll to be treated at all points in the

structure.

In a preferred embodiment of the device according to the invention the fluids are introduced through the block or roll (4) by way of the perforated core (3). The pipes (13) return the solutions to the tanks (11). During the phases of treatment by diffusing solution through the structure to be treated, the pipes (13) in the top part of the reactor (1) are kept open to enable overflow evacuation and the pipes (13) connected to the bottom part of the reactor are closed by a valve or a solenoid valve so that the reactor fills with solution and the block or roll (4) is mostly or totally immersed.

In a preferred embodiment of the device according to the invention it is advantageous for the block or roll to be rotated at a moderate speed during the various treatment phases of the porous structures, to contribute to optimum diffusion of the fluid through it.

The device according to the invention is designed for optimum implementation of the conductive activation process by depositing conductive polymer described in the document 98.03375.

To this end, it is especially intended to provide the following operating characteristics:

- great homogeneity of treatment during each of the main steps (preparatory pre-treatment of the surfaces, depositing or fixing a monomer, polymerising the monomer by oxidation-doping), by diffusion of solutions through the entire mass of the structure to be treated, in contact with all points of its developed surface;

- effective elimination and recovery of the treatment solutions to minimise the consumption of active products and to avoid obstructing the structure and the risk of it becoming clogged;

- effective rinsing throughout the porous structure to be activated;

- separating solutions which must not mix;
- supporting the blocks or rolls to limit or prevent deformation during the steps of the process;
- a compact reactor, to limit the volumes of treatment solutions;
- simple operation, simple maintenance and the facility for automation;
- the facility for drying the porous structure;
- compact implementation and economic design of the device as a whole; and
- rapid chaining of operations, in order to achieve a complete treatment cycle in the shortest possible time, for reasons of economy when the process is implemented on an industrial scale.

To meet these multiple constraints, the device according to the invention provides varied responses and great flexibility of use, as we have already taken pains to demonstrate. Further comments show this in more detail.

For successful conductive activation of the porous structures it is essential that all of their developed surface is treated with each of the solutions.

To this end, and as indicated above, the solutions are injected through the block or roll, from its inside towards its outside, and/or vice-versa, according to the direction adopted for the flow of the fluids. It is advantageous to rotate the block or roll - especially if injection is effected from the core - for example at a speed of approximately 60 rpm, so that the resulting centrifugal force is added to the force with which the liquid is injected on leaving the core and contributes to fast diffusion through the block or roll. Rotation about a horizontal axis maintains a homogeneous diffusion, which otherwise might not be achieved with an immobile block or roll, because of the force of gravity, the effect of which would be aggravated by the head loss within the porous

structure.

The advantage of rotation is particularly marked at the start of the solution injection phase, when the reactor has not been entirely filled with said solution.

It has already been stated that it is important to eliminate the treatment solutions effectively from the structure and to recover them in order to minimise the consumption of active products and to avoid obstructing the structure and the risk of it becoming clogged.

When a treatment step is finished, the reactor must be drained and the solution returned to its storage tank.

In a preferred embodiment of the device according to the invention the reactor is drained via the pipes (13) opening onto the bottom of the reactor, or to be more precise by the pipe which connects the bottom of the reactor to the storage tank specific to the solution that has just been used. Draining can be by gravity alone, or forced by means of a pump, not shown in figures 1 and 2, which pump is preferably specific to each drainage circuit and therefore to each storage tank.

To facilitate complete draining of the reactor, and therefore good recovery of the solutions and minimum mixing of successive solutions, it is advantageous for the reactor bottom not to be horizontal, but instead inclined or concave on the inside, and to position the openings of the bottom pipes (13) on a line linking the lowest points of the reactor. In particular it is possible and advantageous to make a cylindrical reactor with the plane end walls vertical. The axis of the cylindrical reactor is then horizontal and materialised by the core (3), as shown in figure 1.

Draining the reactor also entails eliminating the portion of the solution that filled the free space within the porous structure to be treated. It has already been pointed out that these structures can be very porous in the

case of cross-linked foams or some complex woven materials (approximately 98% porosity for foams of the so-called "100 ppl" (100 pores per linear inch) grade, i.e. foams having approximately 40 pores per linear centimetre at the surface); foams of this kind have a high capacity to retain liquids.

In the context of the present invention, it is conceivable to compress the porous structures, and in particular the foams, in the same way as a sponge is compressed to squeeze out liquids that it contains. The rack (6) and/or the flanges (7) can be designed to allow this; in particular they can be articulated and compress the block or roll to wring it out before returning to their normal position.

However, there are polyurethane foams that are deformed when they emerge from any such operation. What is more, very fast draining of the reactor, which leaves a porous structure, in particular a foam, largely filled with solution, can also deform the structure if it cannot support the weight of liquids inside it without "collapsing".

For structures of the above kind, the device according to the invention provides a satisfactory response to these constraints, by draining the reactor "slowly", so that the porous structure does not have to support its own volume of liquid, and so that the liquid level drops virtually homogeneously in the reactor around and within the porous structure block or roll. When the general level of the liquid in the reactor reaches the point where the block or roll has emerged totally from the liquid, the structure has largely been drained of solution by the effect of gravity. A limited quantity of liquid remains in the structure, largely retained by the capillary effect.

This residual quantity can advantageously be eliminated by centrifuging the block or roll, the core

being rotated by the motor (12). Again with the aim of avoiding deformation of the structure, it would appear beneficial to run up to the final rotation speed progressively as the solution is centrifugally expelled from the structure. Excellent elimination of the residual solution contained in the block or roll can be obtained in a few tens of seconds or a few minutes, depending on the density of the structure, the thickness of the block or roll and the rotation speed.

For cross-linked foam structures, which are generally more sensitive to the risk of deformation than woven and non-woven materials, the rotation speed can advantageously be limited to a figure of the order of 200 to 300 rpm. The rotation speed can be greater than 500 or 1 000 rpm with stronger structures, and in particular felts.

The solutions centrifugally expelled from the block or roll impinge on the walls of the reactor and are recovered in the drainage pipe (13) leading to the corresponding storage tank.

In a variant of the device according to the invention, in order to accelerate centrifugal recovery on the walls of the reactor, the reactor can be vertical, in which case the core (3) is itself vertical.

The reactor can be positioned in this way either permanently or only during centrifuging. In the latter case, the axis of the reactor can then be tilted between the horizontal and the vertical on a chassis enabling it to pivot. A variant of this kind, although it complicates the construction of the device, can be beneficial in that it reduces the duration of the operating cycle and avoids the risks of heterogeneous treatment, which risks can arise in the case of an axis that is permanently vertical (with the possibility of uneven treatment between the top and bottom parts of the block or roll).

Exactly as when eliminating or recovering active treatment solutions, the required rinsing operations must be carried out under optimum conditions.

The theoretical configuration of the device according to the invention enables cleaning and rinsing, whether with mains water, demineralised water or any suitable solution, by injection and evacuation in the manner described for the active treatment solutions. In particular, it is possible to rinse or even to clean the structure before carrying out the cycle of operations described in the document 98.03375, which can eliminate from polyurethane foams, for example, manufacturing impurities, polymerisation catalysts, cutting greases, etc, and more generally any unwanted residual solid or liquid volatile products.

It is also possible, in the context of the present invention, to use the circuit for injecting and evacuating the fluids to blow treatment gases or gas mixtures through the block or roll. This can apply to air in particular, to complete the elimination of all traces of liquid within the structure. The air or gas blown through the circuit can advantageously be heated to a temperature that is not harmful to the basic structure, the treatment or the products deposited, and generally to a temperature of a few tens of degrees Celsius, to help rapid drying of the structure.

Due to the effect of the various treatment solutions, and in particular some solutions for depositing or fixing monomers, and the intermediate steps of evacuating fluids, some porous structures to be activated can show a natural tendency to deform. This can be the case with cross-linked polyurethane foams. The device according to the present invention solves this potential problem: supporting the block or roll is then of great importance. The rack (6) and the flanges (7) are designed to fulfil

this function.

In the case of conductive activation of rolls of woven or non-woven material, the rack can advantageously be adapted to surround the structure to be treated closely, without compressing it. For treating polyurethane foams it can be advantageous to proceed otherwise. The step of depositing a monomer, especially pyrrole, can soften the structure and swell its meshes. The block or roll then expands in three dimensions at this stage, and can suffer irregular deformations, as referred to above.

External expansion of the block or roll can be prevented by means of racks and flanges, but this is not always an optimum solution because, even if the deformation is contained within the original volume, it can nevertheless occur inside it, risking the production of structural irregularities (differential density and porosity) and "crumpling" of the meshes of the pores. The foam can then lose its isotropic character and/or some of its mechanical characteristics.

The device according to the invention proposes to solve this problem not by preventing but by absorbing the increase in the volume of the blocks or rolls of cross-linked foam that are susceptible to swelling.

This action can be carried out within the reactor by using a rack (6) whose inside diameter is slightly greater than the outside diameter of the block or roll; the intermediate space is then filled with a structure which is porous but compressible, which will partly contain and homogenise the swelling of the treated product. It must be porous, for the same reason that the rack is perforated, i.e. in order not to increase significantly the head losses of the fluids between the centre and the walls of the reactor (and vice-versa). It must be compressible, and must not swell during treatment, like the structure to be activated, in order to be able to absorb, and therefore

limit, the increase in volume of the block or roll. The material used to fulfil this "buffer mattress" function can have a cross-linked cellular structure that is inert or virtually inert to the global conductive polymer deposition process and is not subject to swelling during the cycle of operations.

Some porous structure blocks or rolls to be activated which are susceptible to swelling can be slightly marked on their outside surface with an impression of the inside surface of the rack (reflecting the shapes of the perforations, the expanded metal or grid, etc), especially during centrifuging. A flexible "buffer mattress" advantageously avoids this risk.

Similarly, "buffer mattresses" can be used between the block or roll and the flanges (7).

The device according to the invention is intended for the industrial application of chemical processes for depositing polymers, and in particular conductive polymers such as polypyrrole, by the method described in the document 98.03375.

This type of cycle of operations uses active treatment solutions containing reagents and the quantities of the solutions used must be minimised, for obvious reasons of process economy.

To meet this objective, the device according to the invention includes a reactor whose shape and dimensions are preferably matched to those of the blocks and rolls to be treated, so that the interior volume of said reactor is only slightly greater than the volume defined by the rack (6) and the flanges (7). Accordingly, it is usually advantageous for the reactor to be substantially cylindrical and to have an inside diameter approximately 4 to 10 centimetres greater than the outside diameter of the rack (6).

The device according to the invention can be made

in various sizes, from a laboratory pilot scale to high-capacity industrial plant. The various embodiments can be controlled manually or the cycle of operations can be partly or totally automated.

5 It is designed for great simplicity of operation and maintenance in all types of application, and particularly for mass production.

Accordingly, the materials from which the reactor is made are preferably chosen so as not to react on contact with the treatment solutions. The materials must therefore not be sensitive to the initial step of oxidising pre-treatment of the structure, with no or little setting on deposition of monomer, and must resist the oxidising solution for polymerising the monomer.

10 By way of non-limiting examples of the invention, mention may be made of the use of the "Uranus B6" and "Hastalloy" alloys, which have good resistance to attack by the monomer oxidising solution, and high-density polyethylene, PVDF and PTFE, which are relatively insensitive during the oxidising pre-treatment to the fixing of manganese dioxide and consequently to the deposition of monomer. This avoids premature wear of the equipment, wastage of active materials and penalising cleaning operations.

25 Without departing from the scope of the present invention, the device can include, as ancillaries of the reactor, treatment solution storage tanks (10), possibly fitted with stirrers (14), temperature regulators, vents (15) and equipment for continuously or intermittently metering and/or adjusting the concentrations of the solutions.

30 Also without departing from the scope of the invention, the same treatment installation can use, instead of a single reactor in which all the steps of the activation treatment are carried out, a plurality of

35

reactors dedicated to one or more treatment steps.

A non-limiting example of one arrangement in accordance with the invention of this kind is shown in figure 3, and in particular:

5 - for each reactor and its components, it limits the constraints concerning the nature of the materials from which it is made to those specific to the single step concerned; and

10 - it increases the productivity of the equipment, each reactor being immobilised by the same block or roll for only the duration of one step, and not for the entire cycle, so that it is possible to process several blocks and/or rolls simultaneously, each being at a different stage of the complete cycle at a given time.

15 A system of the above kind can be automated by means of a mechanism (16) for transferring the blocks or rolls, placed between the reactors, as shown in figure 3, or adapted to transfer the blocks or rolls from one reactor to another, the reactors being placed in a row.

20 Figure 3 shows a particular type of door or cap (2) which is advantageously designed for robot manipulation of the blocks or rolls: the caps are rotary caps at the top of the reactor and can also integrate members (17) which attach to the core carrying the block or roll.

25 By way of non-limiting illustration of the invention, there are described hereinafter operating characteristics that have been obtained with semi-industrial treatment equipment.

30 Said equipment corresponded to the type of arrangement shown in figures 1 and 2.

The reactor, made from "Uranus B6" alloy, had an inside length of 1 200 mm and an inside diameter of 700 mm. The outside diameter of the rack (6) was 620 mm and its thickness was 5 mm.

35 The block or roll to be treated was a cylinder

1 000 mm long with an outside diameter of 500 mm.

Trials were conducted on blocks and rolls of polyurethane foam of the "ppl 100" grade (having approximately 40 pores per linear centimetre).

5 Conductive activation was effected by depositing polypyrrole.

The cycle of operations was as follows:

<u>Step</u>	<u>Duration</u>
1 - Loading the structure to be treated	05 minutes
10 2 - Oxidising pre-treatment	13 minutes
3 - Draining and centrifuging	05 minutes
4 - Rinsing and centrifuging	08 minutes
5 - Depositing/fixing the monomer	08 minutes
6 - Draining and centrifuging	05 minutes
15 7 - Polymerisation by oxidation-doping	15 minutes
8 - Draining and centrifuging	10 minutes
9 - Rinsing and centrifuging	08 minutes
10 - Drying	05 minutes
11 - Offloading and cleaning	10 minutes
20 Total cycle time:	<u>92 minutes</u>

The oxidising pre-treatment was carried out using an aqueous solution of potassium permanganate, the monomer was precipitated in a solution of pyrrole in a mixture of water and potash, and oxidation-doping was carried out using an aqueous solution of ferric chloride and fluoboric acid.

The treated rolls consisted of a strip 1.7 mm thick and 10 metres long. They therefore had an apparent surface area of structure to be activated of 100 square metres. After activation, the strip could be paid out without difficulty, i.e. without significant problems of adhesion between the contacting surfaces of the rolled strip. The conductive polymer deposited, which was polypyrrole, had imparted to all points of the strip an electrical conductivity less than 30 ohms-square.

The treated blocks were peeled to obtain strips with a final thickness of 1.7 mm, the electrical conductivity of which at all points was also less than 30 ohms-square.

5 Conductive activation effected directly on blocks of foam is naturally followed by peeling the block to obtain strips, or by any other form of cutting. This enables accurate cutting to a required thickness.

10 In the case of rolls, as in the case of blocks, conductive activation was obtained throughout the thickness of the porous structures, on the surface of every mesh, by a continuous deposit of a conductive polymer over the whole of the developed surface, without clogging the pores.

15 Similar results were also obtained throughout rolls of various woven and non-woven materials activated by continuous deposition of a conductive polymer on the surface of each fibre or filament, without clogging the pores.

20 Devices according to the invention can be made larger or smaller than indicated hereinabove. For example, it is possible to make reactors for treating blocks or rolls 2 metres long and 1 metre in diameter.

25 Naturally, and as is clear in any event from the foregoing description, the invention is not limited to the particular embodiments which have been described by way of example.

 The invention is not limited to the examples given, but encompasses all variants thereof.

CLAIMS

1. A chemical device for depositing conductive polymer on complex porous cross-linked foam, felt or woven material structures to impart electrical conductivity to said structures, characterised in that it includes one or more reactors in which the various conductive activation treatment steps are effected within said structures, throughout the thickness thereof, on the surface of each of their fibres or meshes, without clogging their pores, to impart to them a continuous electrical conductivity over the whole of their developed surface, and in that it enables treatment of structures of varying thicknesses and shapes, in particular in the form of blocks or rolls (cylinders formed by a rolled strip), throughout their volumes, and without unrolling them in the case of rolls, the various treatment solutions being passed through said blocks or rolls.

2. A device according to claim 1, characterised in that it includes means for carrying out the following conductive activation treatment steps on the blocks or rolls, these various steps being carried out one after the other throughout the volume of the structure to be treated and the various treatment fluids being passed through said blocks or rolls:

- optional cleaning and/or rinsing of the basic structure,
- optional draining, wringing, centrifuging and/or drying,
- surface preparation pre-treatment,
- optional rinsing, draining, wringing, centrifuging and/or drying,
- deposition of a monomer,
- optional rinsing, draining, wringing, centrifuging and/or drying,
- oxidation of the monomer, leading to its

polymerisation to yield an electrically conductive polymer, and doping thereof, and

- optional rinsing, draining, wringing, centrifuging and/or drying.

5 3. A device according to claim 1, characterised in that it includes at least one reactor equipped with a hollow, perforated and rotatable core onto which the porous structure block or roll to be treated is fitted, said core being used to inject the treatment solutions used into the
10 block or roll and/or to aspirate it therefrom and/or to rotate the block or roll on itself in order to homogenise the diffusion of the fluids within it and/or to expel said fluids centrifugally.

4. A device according to claims 1 and 3, characterised in that flanges and a perforated rack fixed to the core contribute to supporting the block or roll around the core.

5. A device according to claims 1, 3 and 4, characterised in that a porous material is disposed between the block or roll to be treated and the rack and/or the
20 flanges.

6. A device according to claim 1, characterised in that it includes tanks for storing the solutions used for the treatment, which tanks are connected to the reactor by
25 pipes for transferring each solution to the reactor and returning it to its specific tank.

7. A device according to claims 1 and 6, characterised in that some or all of the storage tanks are equipped with stirrer systems and/or temperature regulation
30 systems and/or metering systems and/or systems for continuously or intermittently maintaining the concentrations of the solutions.

8. A device according to claim 1, characterised in that the fluid supply and evacuation circuits can be used
35 for the forced passage of treatment gases or gas mixtures,

and in particular for the passage of air.


9. A device according to claim 1, characterised in that the rack and/or the flanges can be used to compress the block or roll of structure to be treated to wring it out.

5

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2

1 / 3


FIG. 1

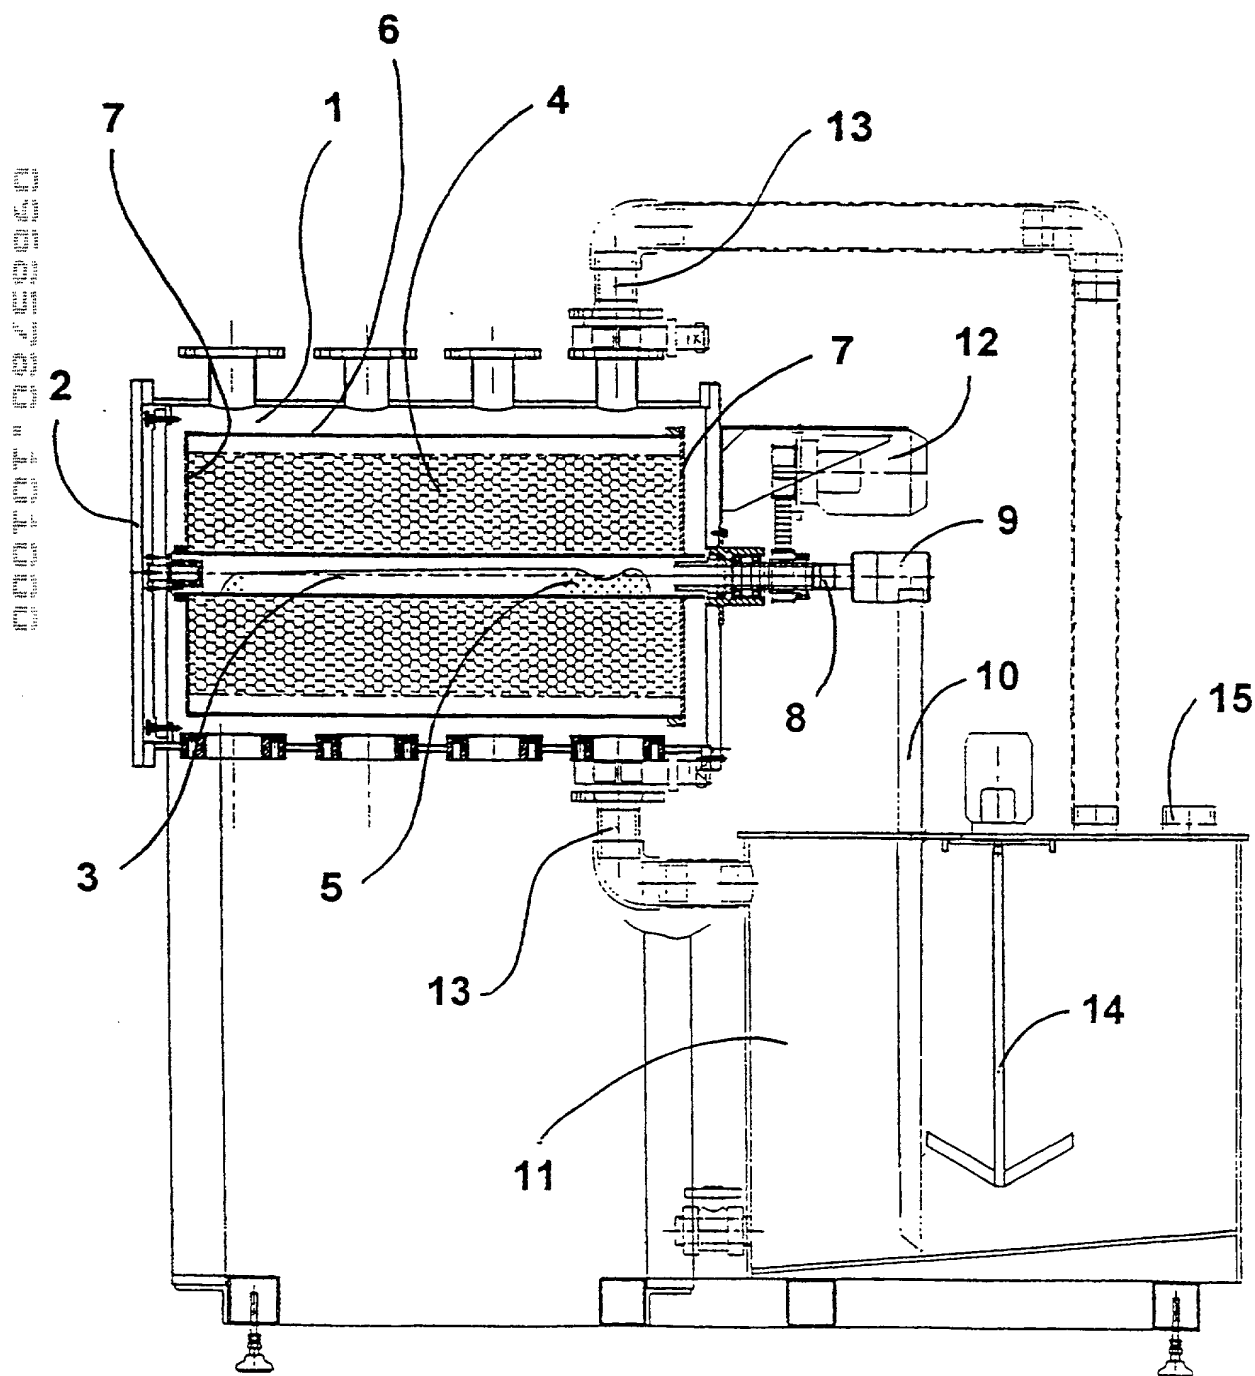


2/3

FIG. 2

Containment Vessel

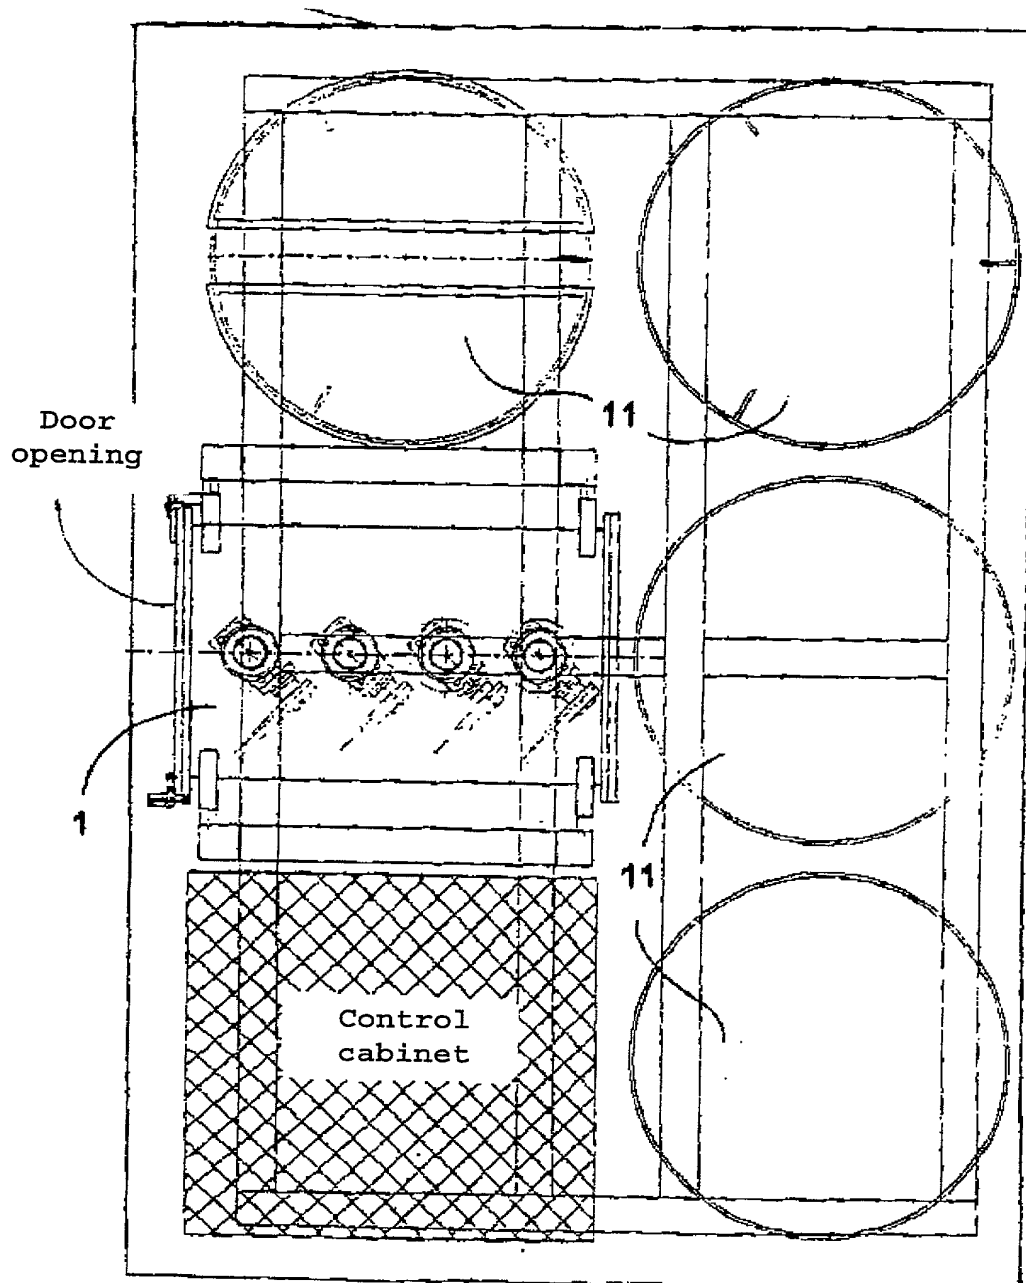

3 / 3

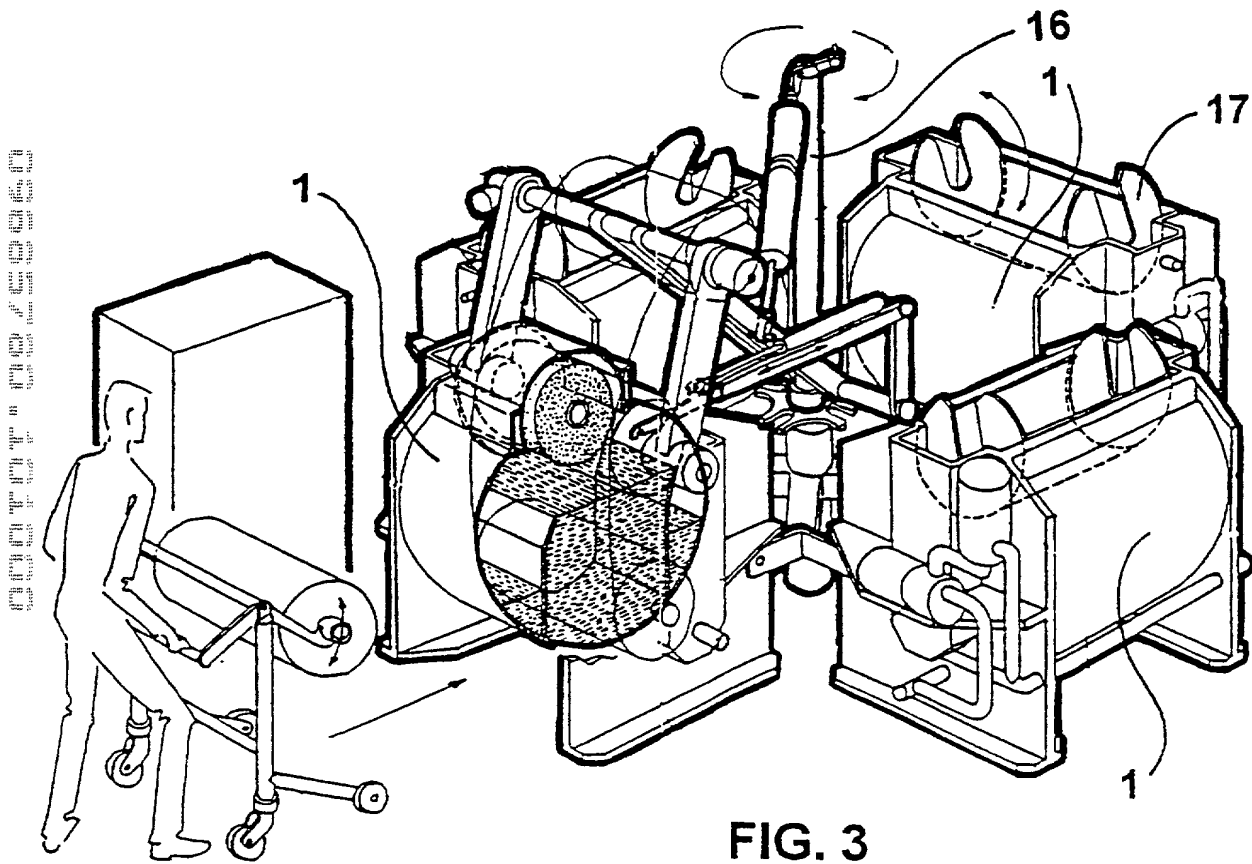

COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY

Docket No. 6-1033-043

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled, the specification of which

(check) ☒ is attached hereto.☐ was filed on _____ as Application Serial No. _____
and was amended on _____ (if applicable).☒ was filed as PCT international application Number PCT/IB99/00618 on April 8, 1999
and was amended under PCT Article 19 on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information known to me to be material to patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application (s) designating at least one country other than the United States of America listed below and have also identified below any foreign application for patent or inventor's certificate or of any PCT international application (s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application on which priority is now claimed:

Prior Foreign Application(s)/PCT Applications (if PCT, indicate PCT)

Priority Claimed

<u>98.04547</u>	<u>French</u>	<u>10 April 1998</u>	
(Number)	(Country)	(Day/Month/Year Filed)	Yes No

(Number)	(Country)	(Day/Month/Year Filed)	Yes No
----------	-----------	------------------------	--------

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Prior U.S./PCT Applications (if PCT, indicate PCT)

(Application Serial No.)	Country	(Filing Date)	(Status--patented, pending, abandoned)
--------------------------	---------	---------------	--

I hereby appoint the following attorney(s) and/or agents(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith. H. Robert Henderson, Reg. No. 18,486; Michael O. Sturm, Reg. No. 26,078; John E. Cepican, Reg. No. 26,851; Richard L. Fix, Reg. No. 28,297; William H. Wright, Reg. No. 26,424; Curtis A. Bell, Reg. No. 36,742; and Thomas J. Oppold, Reg. No. 42,054.

Address all telephone calls to Curtis A. Bell telephone no. 515-288-9589Address all correspondence to: HENDERSON & STURM LLP telefax no. 515-288-4860206 Sixth AvenueSuite 1213Des Moines, Iowa 50309-4076

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor Bernard BUGNET

Inventor's signature _____ Date _____

Citizenship FrenchResidence F-94420 LE PLESSIS-TREVERSE (FRANCE)Post Office Address 13, avenue Charles VanelF-94420 LE PLESSIS-TREVERSE (FRANCE)

Full name of second inventor Jacques DONIAT
Inventor's signature _____ Date _____
Citizenship French
Residence F-94300 Vincennes (FRANCE)
Post Office Address 1, boulevard de la Liberation
F-94300 Vincennes (FRANCE)

Full name of second inventor Robert ROUGET
Inventor's signature _____ Date _____
Citizenship French
Residence F-75016 Paris (FRANCE)
Post Office Address 130, boulevard Murat
F-75016 Paris (FRANCE)